

Technical Data Sheet

Doc No–Ab/TDS/BC-139

Rev No: 01

TECHNICAL DATA SHEET

Abdos Labtech Pvt. Ltd.

Spray Bottle, LDPE

Valid for Catalog No. P11191, P11192, P11200

1. Description/Specification

1.1 Description: Spray Bottle, LDPE

1.2 Raw material:

1.2.1 Body: LDPE (Low Density poly Ethylene)

1.2.2 Cap: LDPE (Low Density poly Ethylene)

According to D.M. 21,2,73 regarding “the hygienic regulations of packing, boxes, tools intended to be in contact with foods” and according to the following realizations with D.M. no. 735 dated 28/10/94, 93/8 C.E.E. law, that gives basic norm for the verification of the migration of the components of the plastic raw material, and 93/9 C:E:E: law relevant to plastic materials and objects intended to be in contact with foods.

LIMITS FOR HEAVY METALS

Referring to D.L. 22 dated 5.2.97, we confirm that the heavy metal in the raw material used for the production of the containers present in our catalogue is lower than 1 ppm in conformity with 94/62 C.E.E. law and American CONEG legislation.

1.3 Other features:

1.3.1 These bottles are used to spray, clean & disinfect bench top space laminar air flow, incubators.

1.3.2 These bottles can also be used to spraying into areas difficult to access as well as application in thin layer chromatography.

1.4 DIMENSIONAL SPECIFICATIONS:

Code	Capacity (ml)	No. per Case
P11191	500	6
P11192	1000	6
P11200	Spare Pump	1



Shiv Ganga Industrial Estate,
Plot no. 1 Lakeshwari, Bhagwanpur,
Roorkee - 247667 Uttrakhand, India
An ISO 9001:2008 Company
A Division of Abdos

Regd. Office :
13A, Government Place (East)
Kolkata – 700069, India
CIN : U85100WB2008PTC123903

P : +91 (0) 1332 235277
E : info@abdoslaware.com
W : www.abdoslaware.com

Technical Data Sheet

1.5 GENERAL FEATURES:

CE mark	No
Autoclavability	No
Translucence	Yes
Resistant	To be effected by radiations
Sterilization	From – 40°C to + 80°C

1.6 Chemical resistance: See website.

1.7 Other Information (not applicable if neglected):


1.7.1 Fair resistance; exposure (30 days) to the chemical does not cause any damage.

1.7.2 Sufficient resistance; exposure causes damage of poor importance, which sometimes is only temporary.

1.7.3 Poor resistance; exposure to chemical is not allowed, or causes immediate permanent damage.

Results of testing with reference materials are to be considered as indication: in case of specific use it is recommended to carry out preliminary testing.

Information relating to the resistances of plastic materials to temperatures, sterilization and washing treatments, have been made as per reports of the raw materials' producers, following the data published in the literature and the experience gained in the use of products

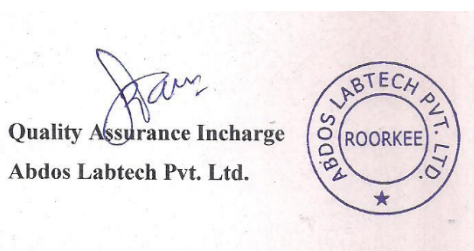

Shiv Ganga Industrial Estate,
Plot no. 1 Lakeshwari, Bhagwanpur,
Roorkee - 247667 Uttrakhand, India
An ISO 9001:2008 Company
A Division of Abdos

Regd. Office :
13A, Government Place (East)
Kolkata – 700069, India
CIN : U85100WB2008PTC123903

P : +91 (0) 1332 235277
E : info@abdoslabware.com
W : www.abdoslabware.com